



KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

ELECTRICAL CIRCUIT PROTECTION DEVICES

MOULDED CASE CIRCUIT BREAKER (MCCB)

- Rating: 16 A – 1600 A
- Breaking Capacity: 10 kA – 70 kA
- Trip Unit: Thermal-Magnetic / Electronic
- Mounting: Panel / DIN Rail
- Use: Feeder and motor circuit protection



MINIATURE CIRCUIT BREAKER (MCB)

- Rating: Up to 125 A
- Curve: B, C, D
- Poles: SP, DP, TP, TPN, FP
- Breaking Capacity: 6 – 10 kA
- Use: Protection for lighting and control circuits

RESIDUAL CURRENT CIRCUIT BREAKER (RCCB)

- Rating: Up to 125 A
- Sensitivity: 30 / 100 / 300 mA
- Poles: 2P / 4P
- Use: Protection against earth-faults and shock hazards



contact us

+91 9765723569

info@khkoverseas.com

www.khkoverseas.com



KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

CONTROL AND PROTECTION DEVICES

CONTACTOR

- Coil Voltage: 24 V – 440 V AC/DC
- Current Rating: 9 A – 800 A
- Auxiliary Contact: 1 NO + 1 NC (expandable)
- Use: Motor and load switching



OVERLOAD RELAY

- Range: 0.1 A – 630 A
- Type: Thermal / Electronic
- Reset: Manual / Auto
- Use: Motor protection against overload

MOTOR PROTECTION CIRCUIT BREAKER (MPCB)

- Rating: Up to 100 A
- Trip Class: 10 / 20
- Breaking Capacity: up to 100 kA
- Use: Compact motor protection and control



ISOLATOR (MCB TYPE)

- Poles: SP / DP / TP / FP
- Rating: 40 A – 125 A
- Use: Safe manual disconnection of circuits

contact us

+91 9765723569

info@khkoverseas.com

www.khkoverseas.com



KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

COMMAND AND SIGNALLING DEVICES

PUSH BUTTON

- Type: Momentary / Maintained
- Contact: 1 NO / 1 NC / 2 NO + 2 NC
- Mounting: 22.5 mm / 30.5 mm
- Colors: Red, Green, Yellow, Blue, Black
- Use: Start/stop and control operations



INDICATOR LAMP

- Voltage: 12 V – 440 V AC/DC
- Colors: Red, Green, Amber, Blue, White
- LED Type: Long life, low power
- Use: Panel status indication

LIMIT SWITCHES

- Type: Roller lever / Plunger / Fork lever
- Contact Rating: up to 10 A @ 240 V AC
- Use: Position and travel sensing in automation



[contact us](#)

[+91 9765723569](tel:+919765723569)

info@khkoverseas.com

www.khkoverseas.com




KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

ELECTRICAL DISTRIBUTION BOARD

ELECTRICAL DISTRIBUTION BOARD

- Type: Single Phase / Three Phase
- Material: CRCA Sheet Steel (Powder-Coated Finish)
- Enclosure Protection: IP42 / IP54 / IP65
- Rated Voltage: 240 V / 415 V AC
- Rated Current: Up to 800 A
- Busbar Material: Electrolytic Copper / Aluminium
- Incoming / Outgoing: MCCB / MCB / Isolator / RCCB
- Mounting: Wall / Floor / Flush Type
- Accessories: Neutral Link, Earth Bar, Cable Glands, Labels
- Application: Safe distribution and control of electrical power in residential, commercial, and industrial installations.

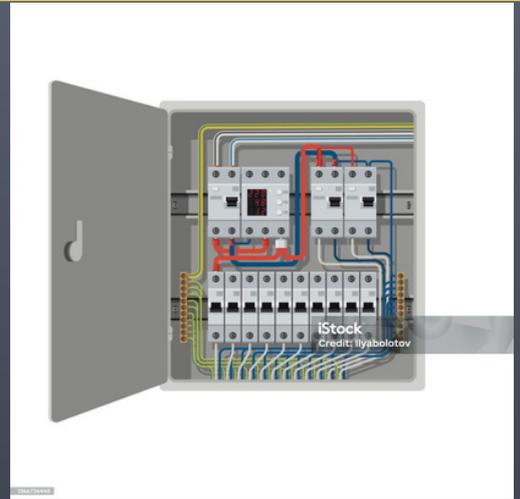

[contact us](#)

[+91 9765723569](tel:+919765723569)

info@khkoverseas.com

www.khkoverseas.com



KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

ELECTRICAL ACCESSORIES

CABLE LUGS/TERMINALS

- Material: Copper / Aluminium
- Type: Ring, Pin, Fork, Tubular, Compression
- Finish: Tin-plated for corrosion resistance
- Use: Reliable cable terminations



CABLE GLANDS

- Material: Brass / Nylon / SS
- Thread Type: Metric / PG / NPT
- Protection: IP65 – IP68
- Use: Secure cable entries in panels

ELECTRICAL EARTHING MATERIAL

- Type: Copper / GI / Chemical Earthing
- Products: Earth Rods, Strips, Clamps, B-Class Plates
- Use: Safe grounding for electrical installations



[contact us](#)

[+91 9765723569](tel:+919765723569)

info@khkoverseas.com

www.khkoverseas.com



KHK OVERSEAS

KNOWLEDGE. HONESTY. KINETICS.

ELECTRICAL ACCESSORIES

FLEXIBLE CABLES AND WIRES

- Conductor: Flexible Annealed Bare Copper (Class 5)
- Insulation: PVC / FR / FRLS / HRFR
- Rated Voltage: 1100 V
- Size Range: 0.5 sq.mm to 16 sq.mm
- Temperature Range: -15°C to +85°C
- Application: Suitable for control panels, machinery, and domestic wiring



[contact us](#)

[+91 9765723569](tel:+919765723569)

info@khkoverseas.com

www.khkoverseas.com